



TAPE & REEL SPECIFICATIONS
32-pin TSOP Package

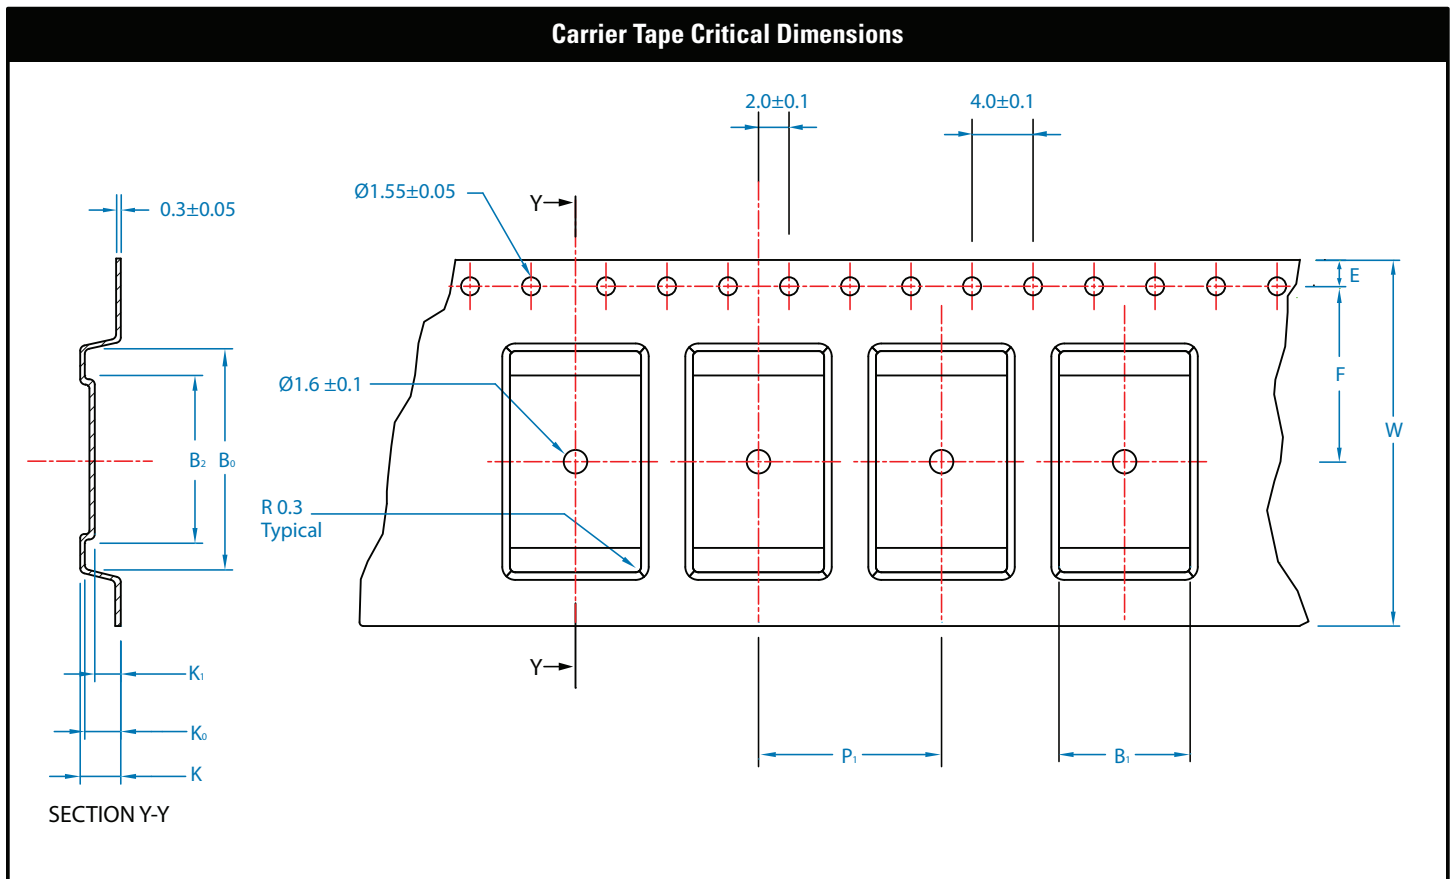

Lead Count	Package	Carrier Tape Dimensions (mm)										
		W	F	E	B ₀	B ₁	B ₂	K	K ₀	K ₁	Pitch (P ₁)	Thickness
32	TSOP	24.0 ± 0.3	11.5	1.75	14.5	8.6	11.0	3.2	1.8	1.4	12.0 ± 0.1	0.30 ± 0.05

Cover Tape Width	Reel Diameter	Leader Length	Trailer Length	Qty / Reel
21.3 ± 0.1 mm	330 mm	390 mm	160 mm	2000

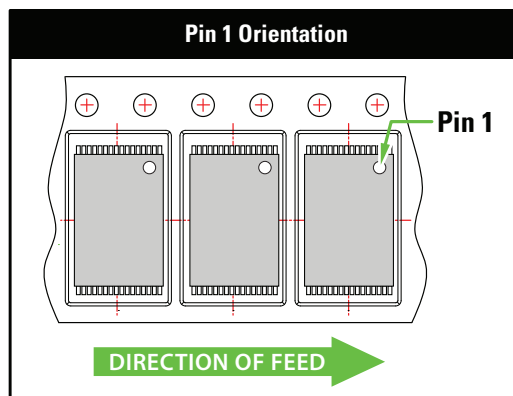


Typical Label Specifications


1. Product number
2. Lot number (max. 2 lots)
3. Quantity (of ea. lot)
4. Internal mfg. no. (optional)
5. Country of origin
6. Date code
7. No. of boxes in shipment
8. Quality assurance stamp

TAPE & REEL SPECIFICATIONS

32-pin TSOP Package

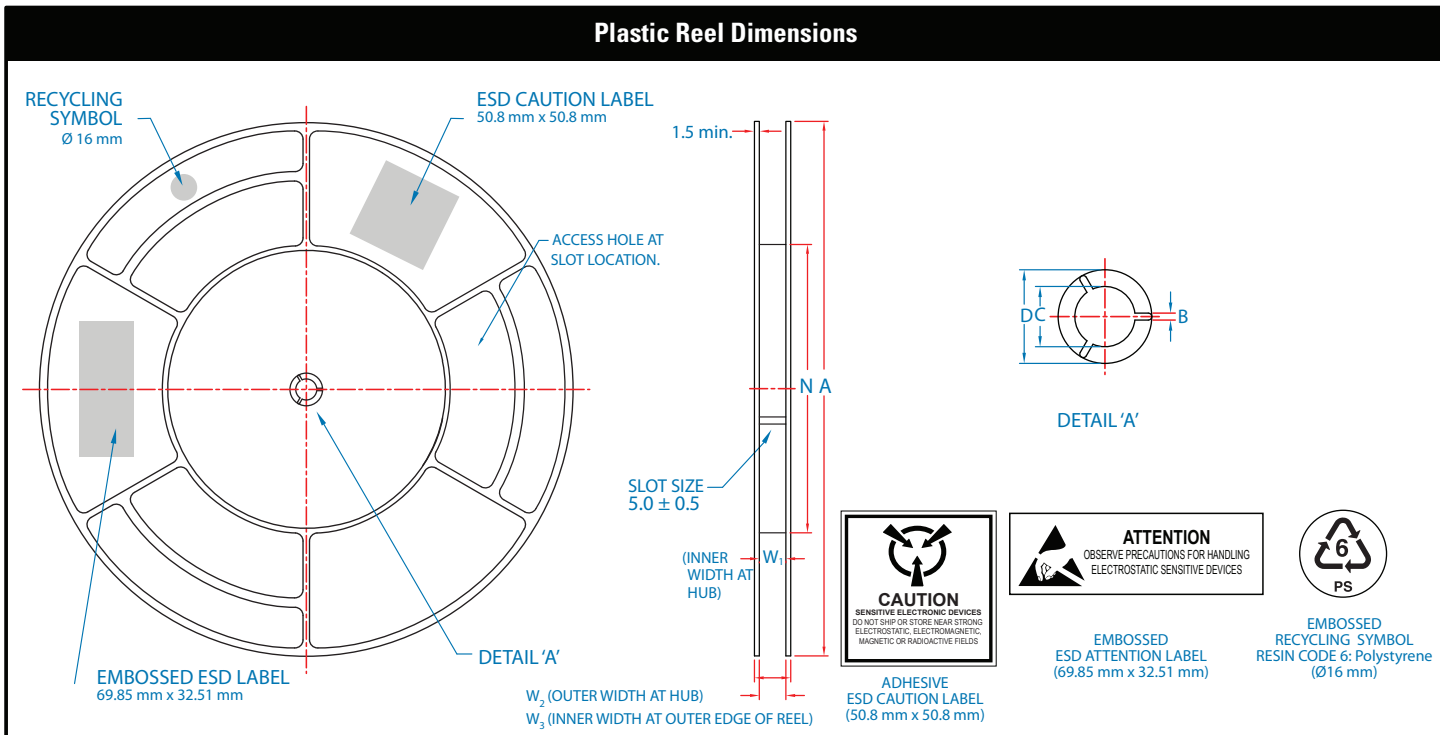

A (mm)	N (mm)	W ₁ (mm)	W ₂ (mm)	W ₃ (mm)	B (mm)	C (mm)	D (mm)
329.2 ± 0.5 (13")	178 ± 0.5	24.4 - 26.4	30.4	23.9- 27.4	2.0 ± 0.3	13.1 ± 0.3	20.5 ± 0.3

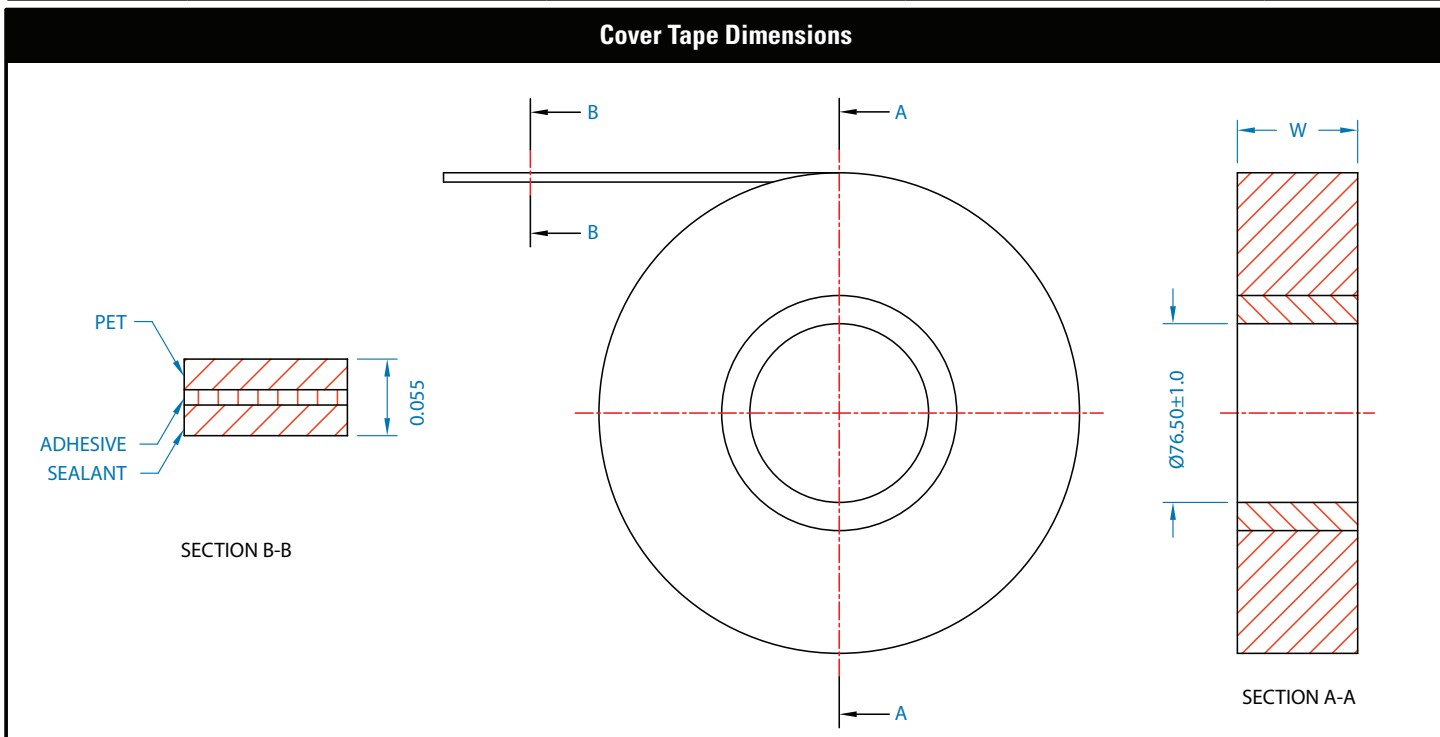

Cover Tape Width (W)	Cover Tape Thickness
21.3 ± 0.1 mm	0.045 - 0.065

NOTES: 1) Surface resistivity of plastic reel control between 10⁹ and 10¹¹ Ohms per square.
2) Drawing is not to scale.

Ramtron International Corporation
1850 Ramtron Drive, Colorado Springs, CO 80921
(800) 545-FRAM, (719) 481-7000
www.ramtron.com